

## Hood S4001 island

Hoods

Code: 2442 121

120 cm



### DETAILS

Material	AISI 304 stainless steel
----------	--------------------------

Texture	Brushed in line
---------	-----------------

Chimney height	810 - 1220 mm
----------------	---------------

Energy class	A+
--------------	----

Product details	Telescopic chimney
-----------------	--------------------

Grease filters	2 grease filters
----------------	------------------

Operation	Suction hood (filtering mode with optional carbon filters)
-----------	------------------------------------------------------------

Air exhaust hole	ø 120/150 mm
------------------	--------------

Lighting	Lighting LED: 12 x 1W (5.600 kelvin)
----------	--------------------------------------

Air flow rate	700mc/h
---------------	---------

Motor power	160W
-------------	------

Hood type	Island suction hood
-----------	---------------------

Type of commands	Minimal electronic controls
------------------	-----------------------------

Suction speed	4 operating speeds
---------------	--------------------

Notes:	Fume exhaust ducts must have an internal diameter not lower than 120 mm
--------	-------------------------------------------------------------------------

## FEATURES

Auto delayed shutdown	All the models with electronic interface can be programmed to turn off the suction at a postponed moment, so as to prolong the aeration of the room even after the cooking has been completed.
-----------------------	------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------


Brushless motor	State-of-the-art Brushless motors allow high air flow rates while maintaining a low energy consumption. Furthermore, they have an almost never-ending duration.
-----------------	-----------------------------------------------------------------------------------------------------------------------------------------------------------------

high performance	Foster hoods motors have a high suction capacity. Their refined design hides a powerful appliance with professional features.
------------------	-------------------------------------------------------------------------------------------------------------------------------

Led lighting	Particular attention to energy saving with LED lighting systems. They assure a 10 times lower consumption and a 10 times longer duration. Our LED lights are designed to create an adequate comfort and safety in the cooking area.
--------------	-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Perimetric aspiration	The perimeter suction is a feature common to many Foster hoods. The filters are hidden by steel- or crystal plates and the suction occurs along their perimeter. This has aesthetic advantages but also functional ones: the cleaning is easier, the suction power and noise-level are improved. The depression which occurs in the perimeter area facilitates in fact the suction of the particles composing the fumes.
-----------------------	--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------


## TECHNICAL DATA

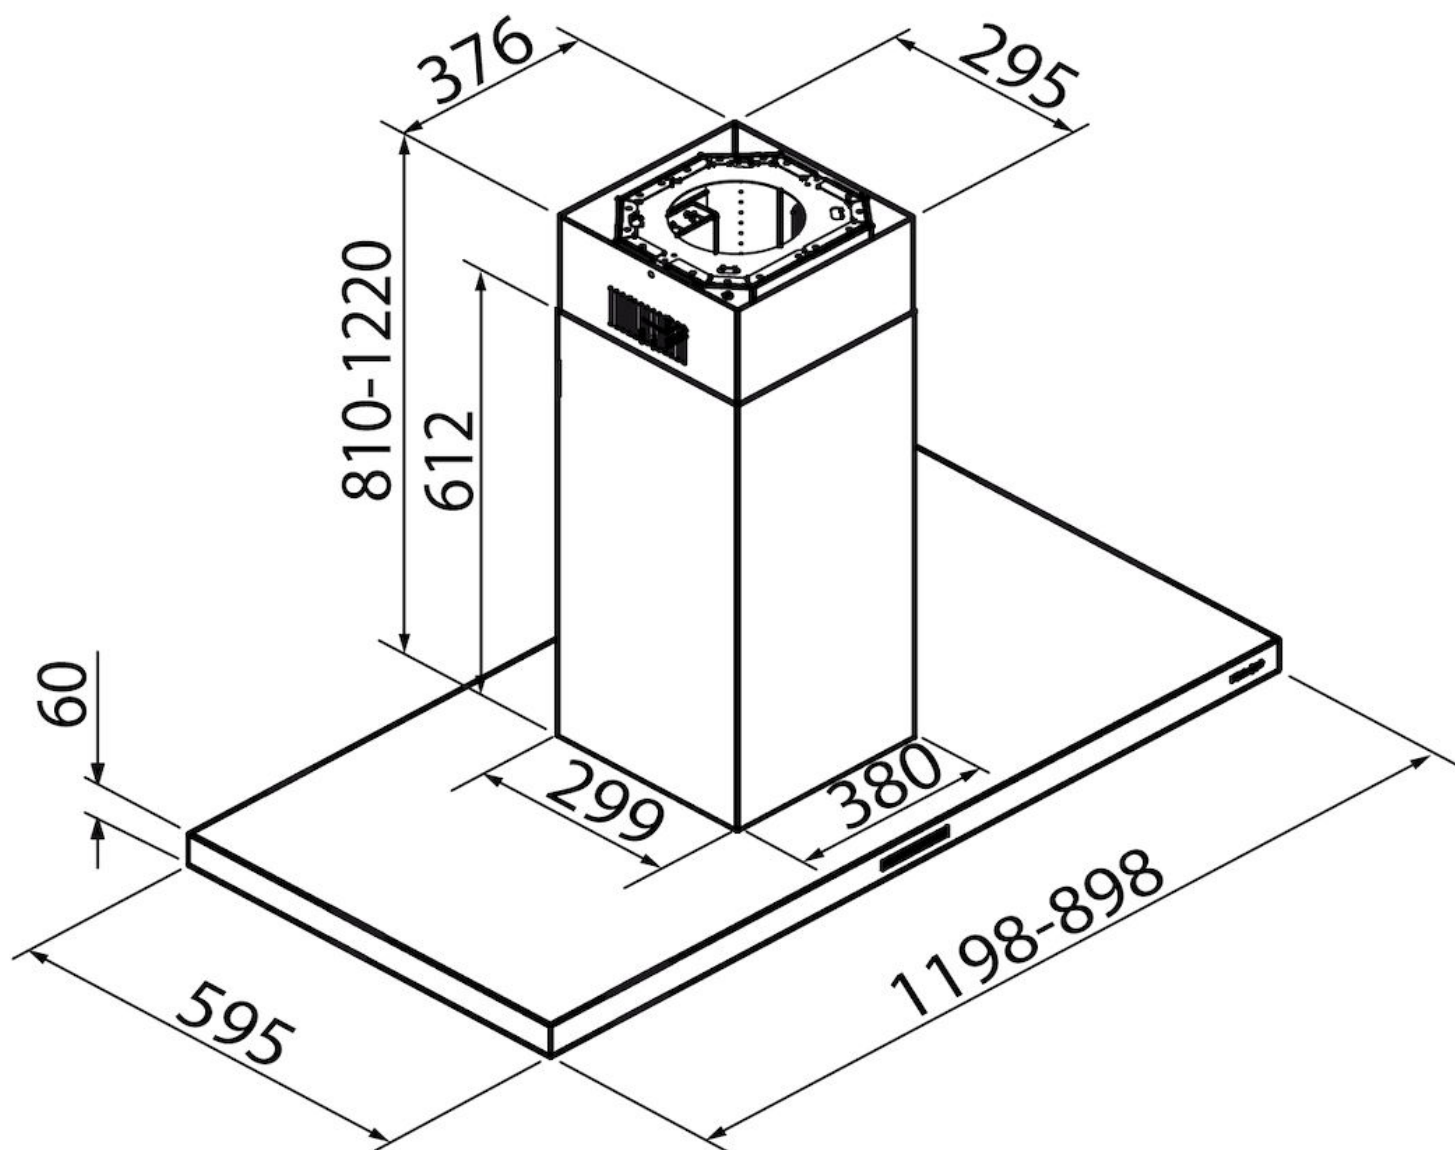


## GALLERY




## OPTIONAL ACCESSORIES

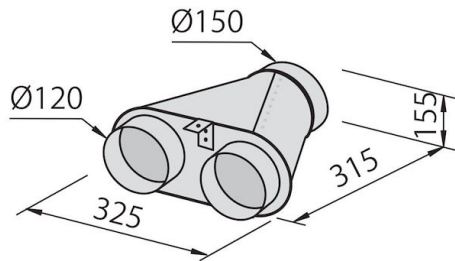

**Collector for 2 pipes**  
2523 000

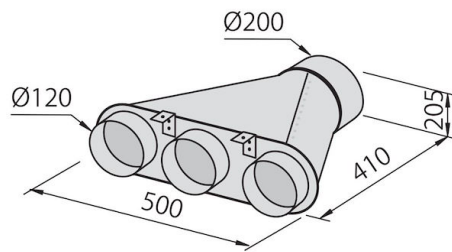

**Collector for 3 pipes**  
2524 000

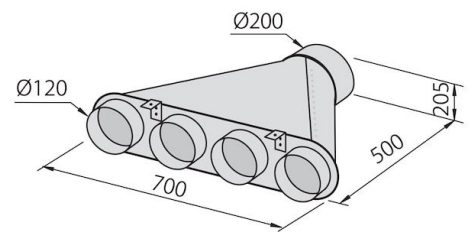

**Collector for 4 pipes**  
2525 000



**Flexible silencing canalization**  
9700 602



**Flexible silencing canalization**  
9700 603



**Long Life carbon filter**  
9700 001