



# **Hood Master wall**

Hoods

Code: 2505 094



### **DETAILS**


Material	Stainless steel
Texture	Brushed in line
Chimney height	Aspiring mode: 630 - 1050 mm / filtering mode: 700 - 1120 mm
Energy class	А
Product details	Telescopic chimney
Grease filters	3 grease filters in stainless steel
Operation	Suction hood (filtering mode with optional carbon filters)
Air exhaust hole	ø 120/150 mm
Lighting	



Air flow rate	700mc/h
Motor power	250W
Hood type	Wall-mounted suction wood
Type of commands	Touch Slider electronic controls
Suction speed	3 operating speeds + 1 timed intensive
Notes:	Fume exhaust ducts must have an internal diameter not lower than 120 mm
FEATURES	
Brushless motor	State-of-the-art Brushless motors allow high air flow rates while maintaining a low energy consumption. Furthermore, they have an almost never-ending duration.
Filter cleaning notice	This function keeps track of the hours of use of the hood and signals the need to wash the filters in order to maintain the perfect efficiency of the hood.
Led lighting	Particular attention to energy saving with LED lighting systems. They assure a 10 times lower consumption and a 10 times longer duration. Our LED lights are designed to create an adequate comfort and safety in the cooking area.
Steel filters	Where the filter is in plain sight, the aluminium filtering element is covered in stainless steel. This solution improves the look and increases the durability of the product.



## **TECHNICAL DATA**

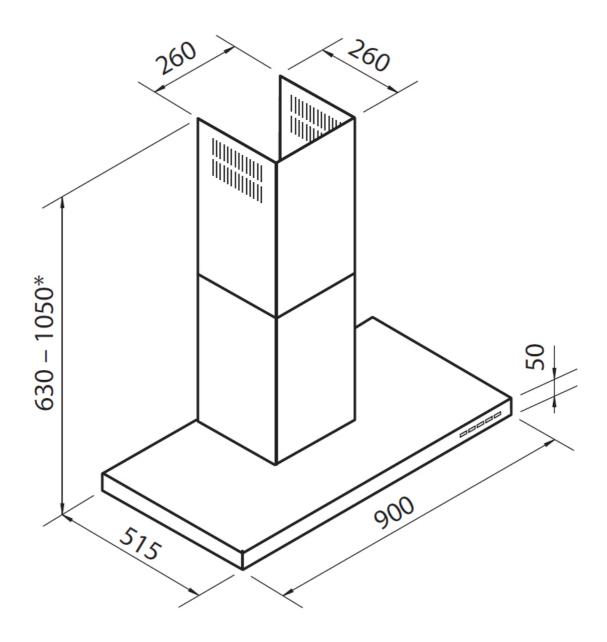


# Foster ==


#### **OPTIONAL ACCESSORIES**




Carbon filter 9700 528



Collector for 2 pipes 2523 000



Collector for 3 pipes 2524 000



Collector for 4 pipes 2525 000



Flexible silencing canalization 9700 602



Flexible silencing canalization 9700 603