



Hood New Wing

Hoods

Code: 2512 062

60 cm



DETAILS


Material	Stainless steel + glass
Texture	Brushed in line
Energy class	A
Product details	Undercabinet
Operation	Suction hood (filtering mode with optional carbon filters)
Air exhaust hole	ø 150 mm
Lighting	Illuminazione 2 LED (4.000 kelvin)
Air flow rate	620mc/h
Motor power	210W



Hood type	Built-in suction hood
Type of commands	Smart rotary control
Suction speed	4 operating speeds
Notes:	Fume exhaust ducts must have an internal diameter not lower than 120 mm
FEATURES	
Hood distance 50 cm	This hood is approved to be inserted even at a much lower than normal distance from the floor, up to 50 cm, all to the benefit of his suction efficiency.
Led lighting	Particular attention to energy saving with LED lighting systems. They assure a 10 times lower consumption and a 10 times longer duration. Our LED lights are designed to create an adequate comfort and safety in the cooking area.



TECHNICAL DATA

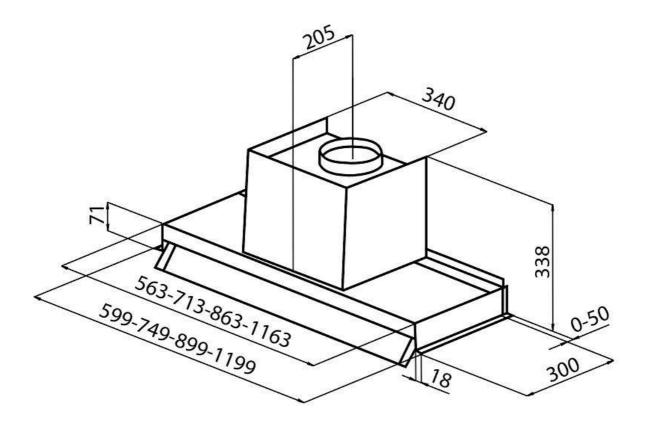



GALLERY



OPTIONAL ACCESSORIES



Carbon filters kit 9700 221



Flexible silencing canalization 9700 602



Flexible silencing canalization 9700 603