

Rangetop S4000 Induction

Rangetop and Top inox

Code: 3170 000



DETAILS

Coloring Black

Material AISI 304 stainless steel

Texture Brushed in line

Dimensions 1200x650 mm

Heating element Five burners

Built-in hole 560 x 480 mm

Total power 11.100 W

Left Ø 260mm- 2.600 (3.700)* W

Down-centre Ø 145 mm- 1.400 (2.200)* W

Up-centre \varnothing 180 mm- 1.850 (3.000)* W

Right 2x220x180 mm- 2.100 (3.700)* W

Power settings 9 power settings per zone + Powerboost

Safety Safety equipment

Type Induction Hob

Type of commands Touch Control

FEATURES

Bridge zone The new cooktops with Bridge function allow to associate two zones forming a single extended cooking zone for pots of large size, or for more than one cooking simultaneously, with maximum flexibility in pot positioning. With the additional Double Booster feature provided by all Bridge cooktops, the exceptional 3700 W power can be concentrated on a single plate or made available uniformly over the enlarged area.

Go&stop function This device initially turns on the plates at maximum power until the selected temperature has been reached.


Pause Useful function that allows you to distract your attention from cooking, interrupting and restoring the settings immediately.

Powerboost Booster function provides increased power to the selected plate. In particular, when the Booster is activated, the plate works for ten minutes at a very high power that allows to heat quickly large quantities of water.

Recall This feature allows you to call back the last settings selected in the previous cooking.


Safety	All electric cooker hobs feature the most modern and sophisticated safety protections: Centralised power-off function; Child-proof safety lock; Residual heat warning lights. Induction models feature the following functions: Safety System that turn off the hob in the absence of the pot; Overflow detector that automatically turns off the plate in case of liquid overflow; Automatic deactivation to prevent accidents caused by forgetfulness.
Slider commands	The Slider control allows for extremely quick temperature setting: with a light touch of the finger you may select the desired power level on the TOUCH display.
Smart fan system	Correct ventilation is essential for the induction hob to function in the best possible way. The Foster system automatically regulates the amount of ventilation to suit the temperatures reached.
T-chef function	It's a function that allows to set particular temperatures (42 °C, 70 °C, 94 °C) and keep them constant during cooking. Elaborate preparations can be easily obtained, with chef-like results. Cooking in a bain-marie, without the aid of a double container for the water, custard or cream sauce will thus always be perfect. By setting the temperature close to boiling, liquids will immediately reach the requested temperature, increasing speed and performance.
Timer	Independent timer from the end-of-cooking function.

TECHNICAL DATA

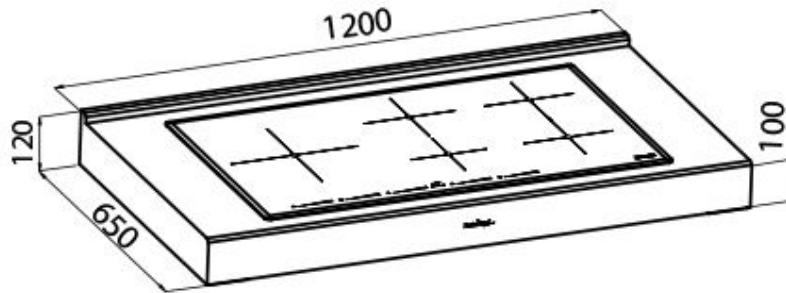

Incasso

①



②

③

