### **ARYA BLACK**

Transformation of the second sec

Induction Hobs Code: 7392 246



### DETAILS


Coloring	Black
Material	Ceramic glass
Pressure	610 Pa
Supply	230 - 380 V (50/60 Hz)
Grid	Aluminum Black
Width	82 cm
Noise level	49 - 70 dB(A)
Cooking zones	210 x 190 mm - 2.100 (3.000)* W
Dimensions	820 x 520 x h 220 mm


Heating element	Four zones
Operation	Suction hood (filtering mode with optional carbon filters)
Suction speed	10 suction speeds (9 + 1 intensive)
Air flow rate	680 mc/h
Built-in hole	View technical data sheet
Total power	7.400** W
2 extended Bridge areas	7.400 W
Energy class	A+
Power settings	9 power settings per zone + Powerboost
Safety	Safety equipment
Туре	Induction Hob
Type of commands	Touch Control
Notes:	**With the PowerControl function, the maximum power can be set in users from 1.400 to 7.400 W in 100 W steps *PowerBoost
Notes:	2 washable grease filters; Automatic delayed shutdown; Grease and carbon filter saturation warnings; Optional filtering operation with carbon filters.

#### FEATURES


Go&stop function	This device initially turns on the plates at maximum power until the selected temperature has been reached.
Powerboost	Booster function provides increased power to the selected plate. In particular, when the Booster is activated, the plate works for ten minutes at a very high power that allows to heat quickly large quantities of water.
Pot detector	All induction cooker hobs detect the pot resting on them, but they also calculate the area they cover. This system allows the energy to be used even more efficiently. Moreover, the plates switch off automatically when the pot is removed.
Smart fan system	Correct ventilation is essential for the induction hob to function in the best possible way. The Foster system automatically regulates the amount of ventilation to suit the temperatures reached.
Safe cooking	All Foster cooker hobs are equipped with safety valves. They shut off the gas supply very quickly if the flame accidentally goes out.
End-of-cooking programming	All operations are programmed by means of the touch-control on the glass itself. Each cooking plate is capable of independent programming, and thus the possibility to set different cooking times.
Timer	Indipendent timer from the end-of-cooking function.
Power control function	PowerControl function allows the use of induction technology also in case of household maximum power as low as 3 kW. The maximum power can indeed be self-limited to the desired level to a minimum of 2.8 kW. Once the maximum power is set, we can forget about the absorbed energy because Foster induction hob will give us a warning about possible limitations, allowing to choose how to allocate the available energy. The hob can be easily reprogrammed at any time to modify or remove the power limit.
Bridge zone	The new cooktops with Bridge function allow to associate two zones forming a single extended cooking zone for pots of large size, or for more than one cooking simultaneously, with maximum flexibility in pot positioning. With the additional Double Booster feature provided by all Bridge cooktops, the exceptional 3700 W power can be concentrated on a single plate or made available uniformly over the enlarged area.

#### **TECHNICAL DATA**

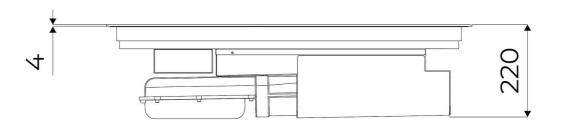


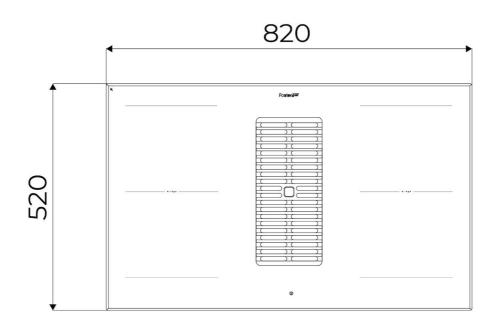



### 9700 577 - KIT H6 cm

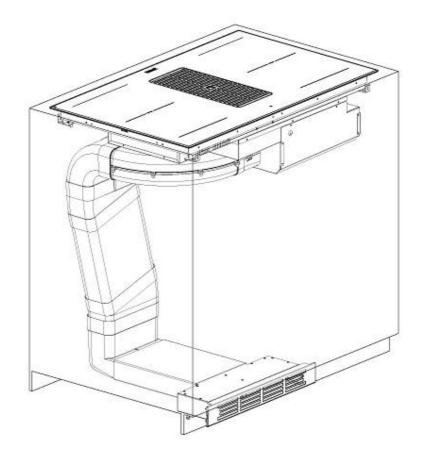


### 9700 580 - KIT H10 cm

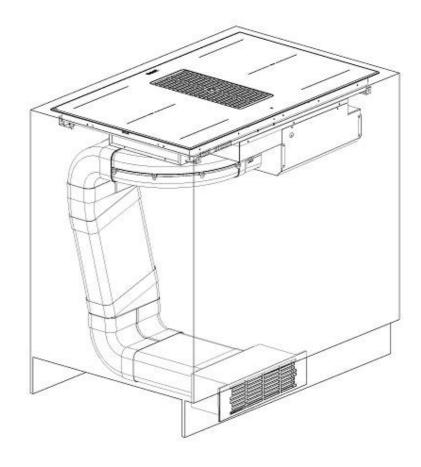

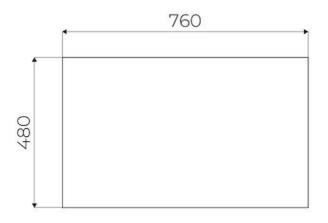




### FT - cut out

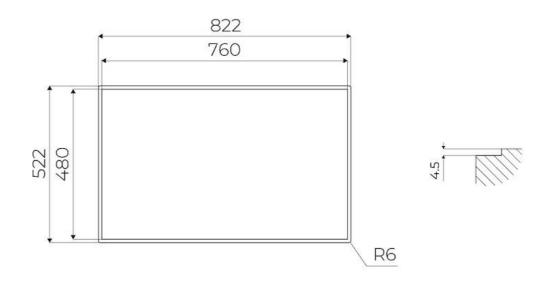

### GALLERY

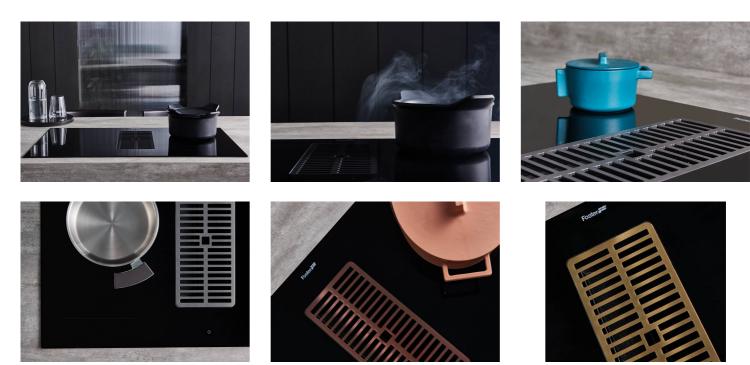

### **OPTIONAL ACCESSORIES**



Filtering kit Arya 9700 580





**Filtering kit Arya** 9700 577



**Carbon filter** 9700 574







**Grid Arya PVD Gold** 8803 119

**Carbon filter** 9700 529

Grid Arya PVD Copper 8803 118



- 0	-		-		
	<u> </u>	_	A		
			10		- 18
					-18
			10		-11
	-	_	14		-8
	-	_	-	_	-8-
	-	_	11		-81
			11		
- 1	_		10		- 18
	-	17	1000		-8
	-	-	- 1-		-81
	-		-	-	-8
	<u> </u>	_		_	-81
- 1				_	
			11		- 10
			11		-18
	-		1000		-8
	-		-		-8
	_			_	-8
	_		1	_	
			10		10
	-				-12



**Grid Arya PVD Gun Metal** 8803 116

Grid Arya Stainless steel 8803 000

Horizontal 15° Corner connector rectangular section 9700 536



No-return valve 9700 538



Rectangular/round adapter 9700 537



White connector - rectangular section 9700 533



White Horizontal 90° Corner connector - rectangular section 9700 534



White tube - rectangular section 9700 532



White Vertical 90° Corner connector - rectangular section 9700 535