

Hood S4001 Special - Island



Hoods

Code: 2442150 2442210 2442300

Code: 2442 150 1201 - 1500 mm

Code: 2442 210 1501 - 2100 mm

Code: 2442 300 2101 - 3000 mm



DETAILS

Material AISI 304 stainless steel

Texture Brushed in line

Chimney height 810 - 1220 mm

Energy class A

Product details Telescopic chimney

Grease filters 2 grease filters

Operation Suction hood (filtering mode with optional carbon filters)

Air exhaust hole \varnothing 120/150 mm

Lighting	2442 150: LED lighting 18 x 1W (5.600 kelvin) 2442 210: LED lighting 24 x 1W (5.600 kelvin) 2442 300: LED lighting 30 x 1W (5.600 kelvin)
----------	---

Air flow rate	700mc/h
---------------	---------

Motor power	160W
-------------	------

Hood type	Island hood
-----------	-------------

Type of commands	Minimal electronic controls
------------------	-----------------------------

Suction speed	4 operating speeds
---------------	--------------------

Notes:	Fume exhaust ducts must have an internal diameter not lower than 120 mm
--------	---

Notes:	Telescopic rods in $\varnothing 28 / 25$ mm tube (included) Optional upon request: -Ladle-rod -Large steel shelf (min. thickness 30 mm) -Rods with steel cable $\varnothing 3$ mm (Not compatible with stainless steel shelf) -Vintage steel finish -Off-center chimney -Shaped chimney for sloping ceiling -Out-of-square Hood side -Fixed tubular rods diameter 10mm -Retractable stainless steel brackets to support wall hoods (no island hoods) -Depth hood body
--------	--

FEATURES

Auto delayed shutdown	All the models with electronic interface can be programmed to turn off the suction at a postponed moment, so as to prolong the aeration of the room even after the cooking has been completed.
-----------------------	--

Brushless motor	State-of-the-art Brushless motors allow high air flow rates while maintaining a low energy consumption. Furthermore, they have an almost never-ending duration.
-----------------	---


Led lighting

Particular attention to energy saving with LED lighting systems. They assure a 10 times lower consumption and a 10 times longer duration. Our LED lights are designed to create an adequate comfort and safety in the cooking area.

Perimetric aspiration

The perimeter suction is a feature common to many Foster hoods. The filters are hidden by steel- or crystal plates and the suction occurs along their perimeter. This has aesthetic advantages but also functional ones: the cleaning is easier, the suction power and noise-level are improved. The depression which occurs in the perimeter area facilitates in fact the suction of the particles composing the fumes.

TECHNICAL DATA

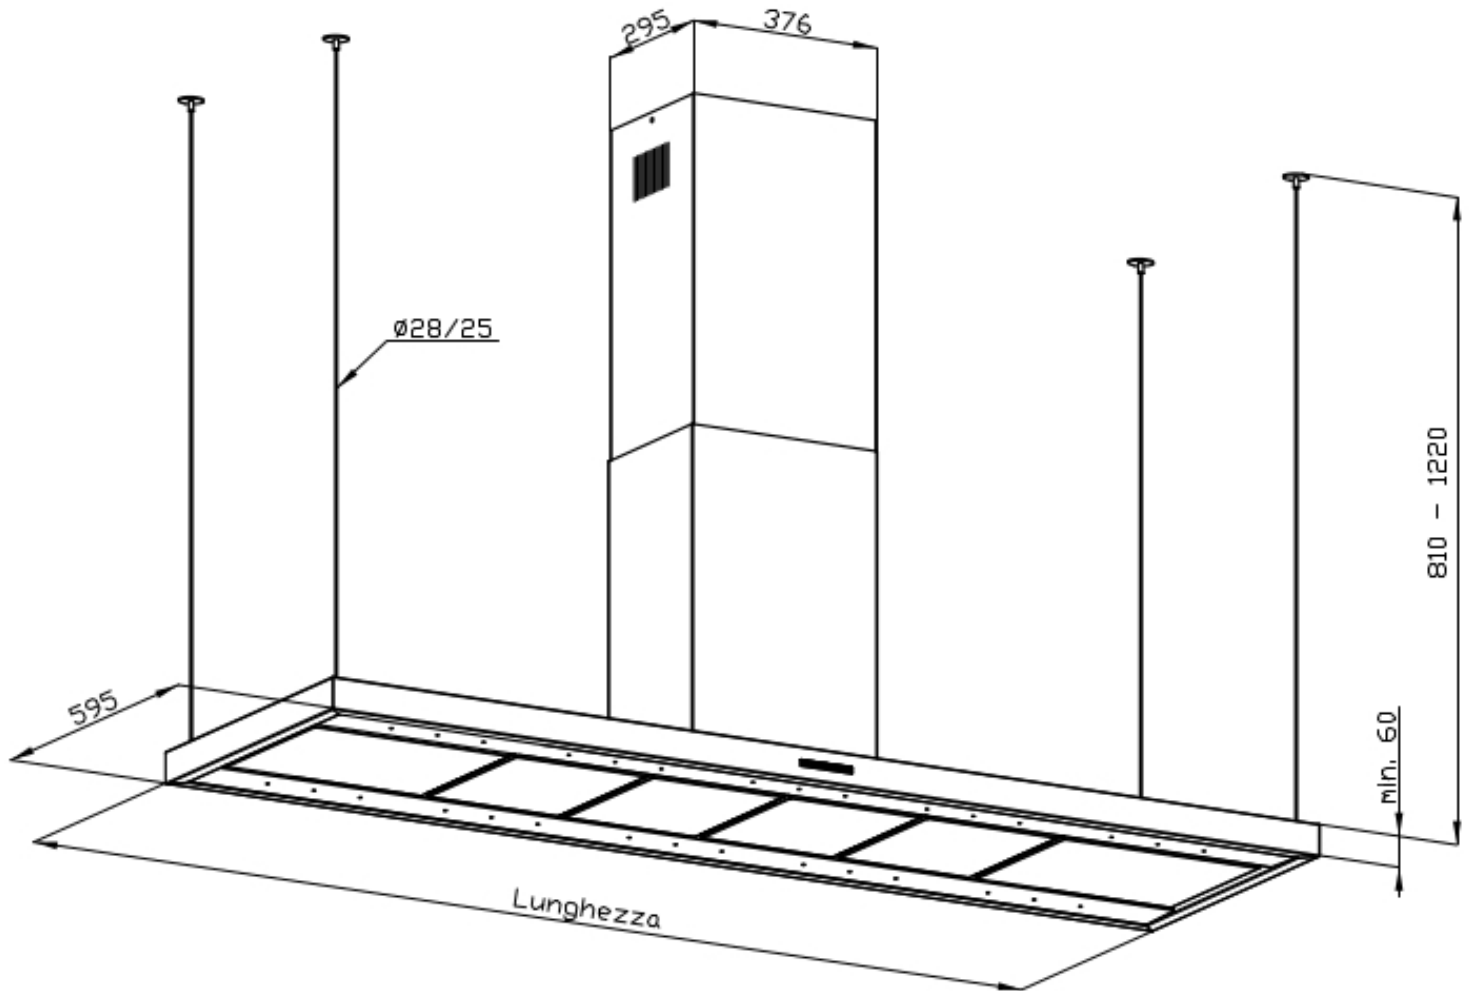

OPTIONAL ACCESSORIES



Long Life carbon filter

9700 001