Hood KS Lux

Hoods

Code: 2504 094

DETAILS

Material	Stainless steel
Texture	Brushed in line
Chimney height	Aspiring mode: 630 - 1050 mm / filtering mode: 700 - 1120 mm
Energy class	A
Product details	Telescopic chimney
Grease filters	Grease filtre in stainless steel
Operation	Suction hood (filtering mode with optional carbon filters)
Air exhaust hole	ø 120/150 mm
Lighting	

Air flow rate	700mc/h
Motor power	250W
Hood type	Wall-mounted suction wood
Type of commands	Electronic pushbutton
Suction speed	3 operating speeds + 1 timed intensive
Notes:	Fume exhaust ducts must have an internal diameter not lower than 120 mm

FEATURES

Auto delayed shutdown	All the models with electronic interface can be programmed to turn off the suction at a postponed moment, so as to prolong the aeration of the room even after the cooking has been completed.
Led lighting	Particular attention to energy saving with LED lighting systems. They assure a 10 times lower consumption and a 10 times longer duration. Our LED lights are designed to create an adequate comfort and safety in the cooking area.
Steel filters	Where the filter is in plain sight, the aluminium filtering element is covered in stainless steel. This solution improves the look and increases the durability of the product.

TECHNICAL DATA

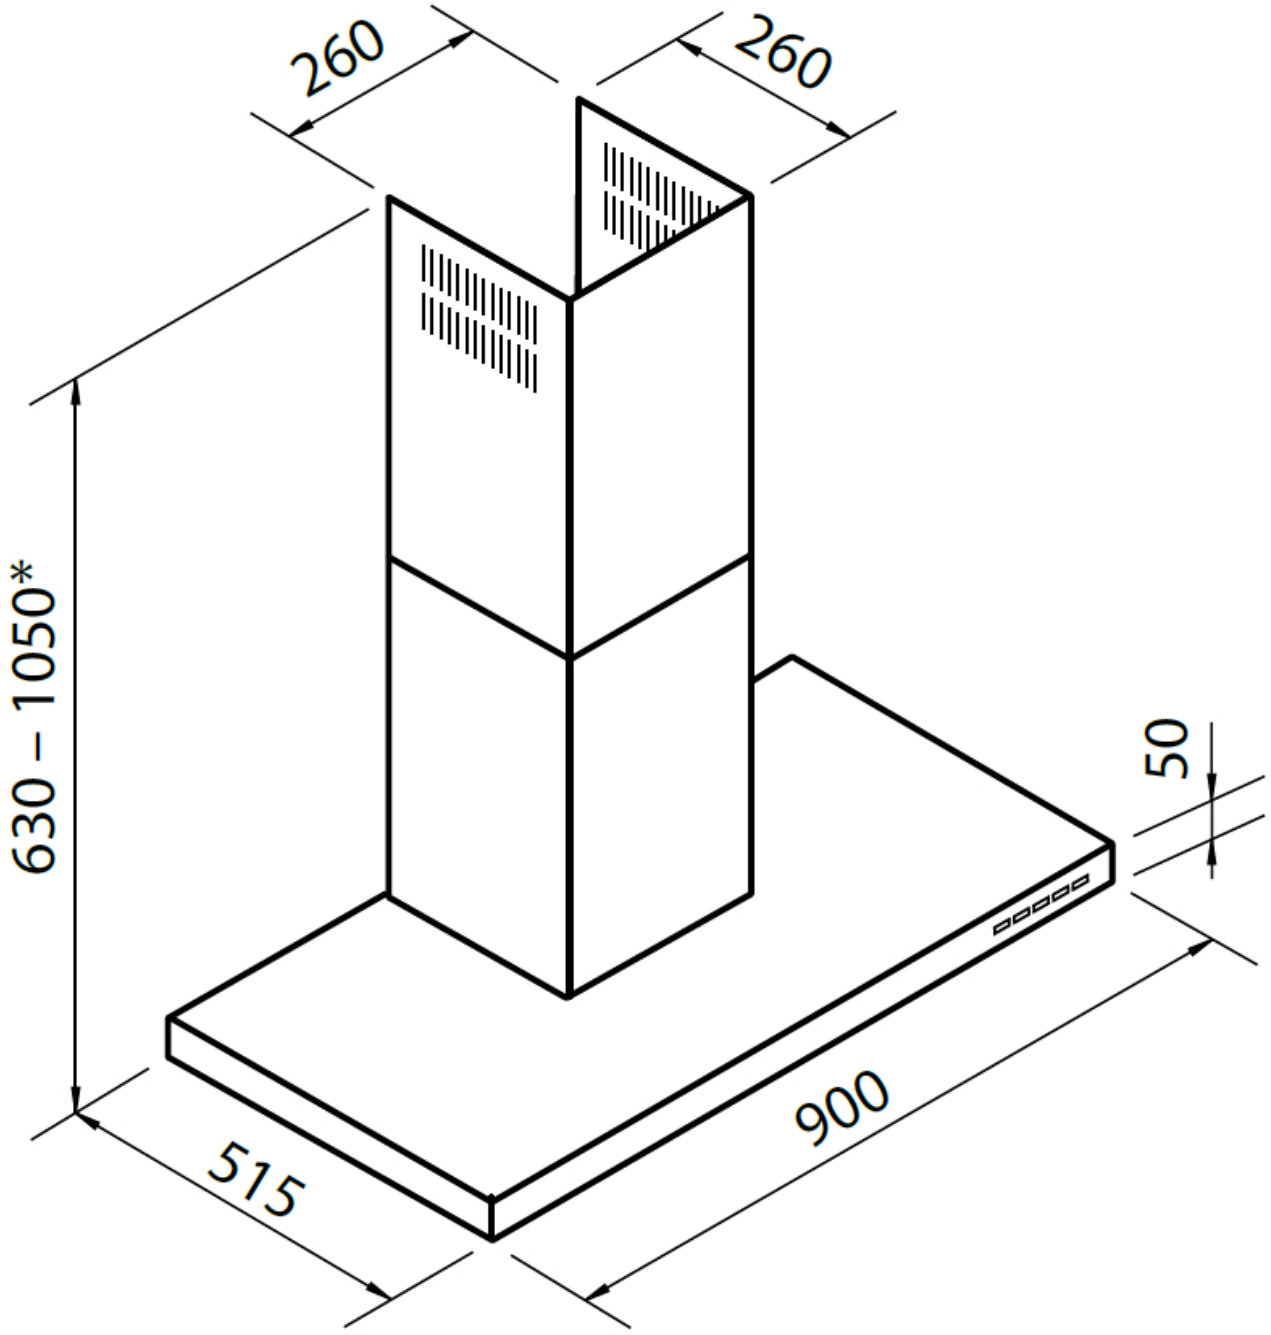

OPTIONAL ACCESSORIES

Carbon filter
9700 528

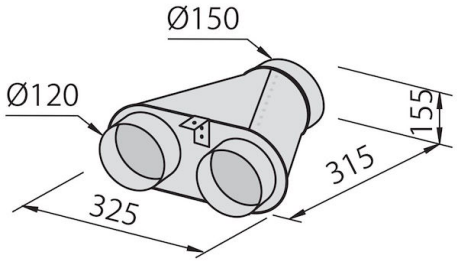

Collector for 2 pipes
2523 000

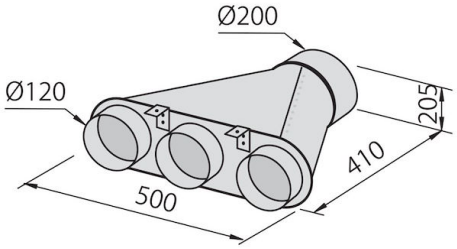

Collector for 3 pipes
2524 000

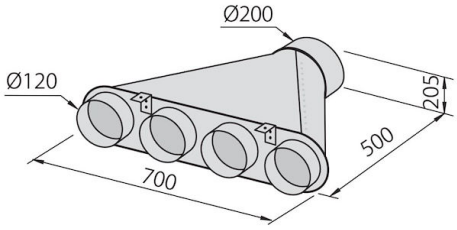

Collector for 4 pipes
2525 000

Flexible silencing canalization
9700 602

Flexible silencing canalization
9700 603