

Hood Master wall 2505094_2505124



Hoods

Code: 2505 __4

Code: 2505 094 90 cm Code: 2505 124 120 cm



DETAILS


Chimney height	Aspiring mode: 630 - 1050 mm / filtering mode: 700 - 1120 mm
Energy class	A+
Product details	Telescopic chimney
Grease filters	Number of grease steel filtres: 90.3 filters hood - 120.4 filtres hood
Operation	Suction hood (filtering mode with optional carbon filters)
Air exhaust hole	ø 120/150 mm
Lighting	Lighting Design (4.000 kelvin): 2 LED for 90 cm hood, 3 LED for 120 cm hood
Material/Finish	satin finish steel

Foster ==

Air flow rate	700mc/h
Motor power	100W
Hood type	Wall-mounted suction wood
Type of commands	Touch Slider electronic controls
Suction speed	8 operating speeds + 2 intensive timed
FEATURES	
Brushless motor	State-of-the-art Brushless motors allow high air flow rates while maintaining a low energy consumption. Furthermore, they have an almost never-ending duration.
Filter cleaning notice	This function keeps track of the hours of use of the hood and signals the need to wash the filters in order to maintain the perfect efficiency of the hood.
Led lighting	Particular attention to energy saving with LED lighting systems. They assure a 10 times lower consumption and a 10 times longer duration. Our LED lights are designed to create an adequate comfort and safety in the cooking area.
Steel filters	Where the filter is in plain sight, the aluminium filtering element is covered in stainless steel. This solution improves the look and increases the durability of the product.

Foster ==


TECHNICAL DATA

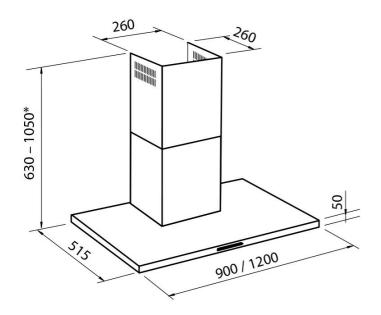


OPTIONAL ACCESSORIES




Carbon filter 9700 528



Collector for 2 pipes 2523 000



Collector for 3 pipes 2524 000



Collector for 4 pipes 2525 000



Flexible silencing canalization 9700 602



Flexible silencing canalization 9700 603