

Hood Q inox wall



Hoods

Code: 2510 090

90 cm



DETAILS

Material	Stainless steel
Texture	Brushed in line
Energy class	A
Grease filters	Grease filters in stainless steel: 1 filter for 60 cm hood, 2 filters for 90 cm hood
Operation	Suction hood (filtering mode with optional carbon filters)
Air exhaust hole	Ø 120/150 mm
Lighting	LED lighting (4.000 kelvin)
Air flow rate	790mc/h
Motor power	275W

Hood type	Wall-mounted suction hood
-----------	---------------------------

Type of commands	Easy electronic controls
------------------	--------------------------

Suction speed	4 operating speeds
---------------	--------------------

Notes:	Fume exhaust ducts must have an internal diameter not lower than 120 mm
--------	---


FEATURES

Auto delayed shutdown	All the models with electronic interface can be programmed to turn off the suction at a postponed moment, so as to prolong the aeration of the room even after the cooking has been completed.
-----------------------	--

Led lighting	Particular attention to energy saving with LED lighting systems. They assure a 10 times lower consumption and a 10 times longer duration. Our LED lights are designed to create an adequate comfort and safety in the cooking area.
--------------	---

Steel filters	Where the filter is in plain sight, the aluminium filtering element is covered in stainless steel. This solution improves the look and increases the durability of the product.
---------------	---


TECHNICAL DATA

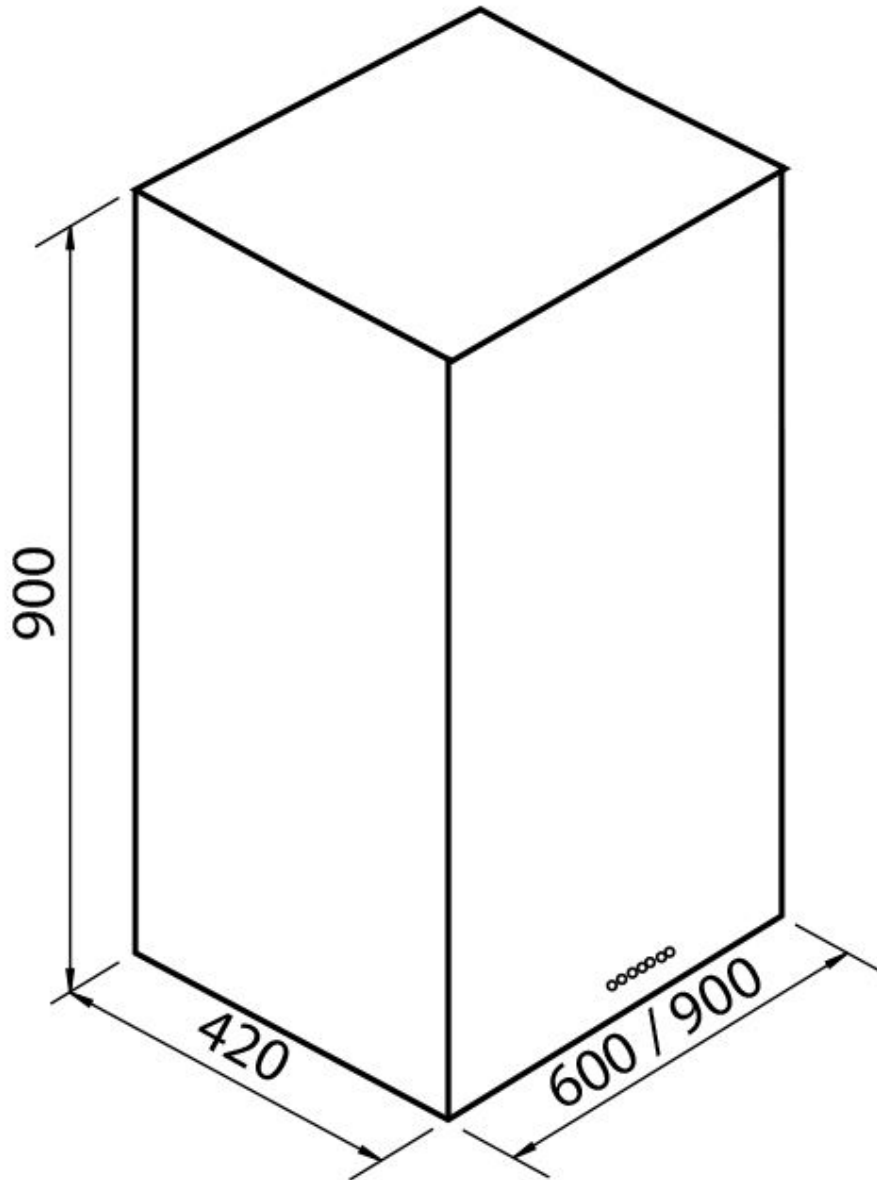


OPTIONAL ACCESSORIES




Carbon filter
9700 601

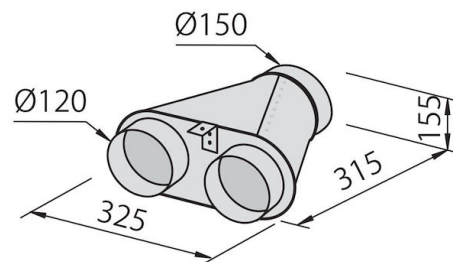

Collector for 2 pipes
2523 000

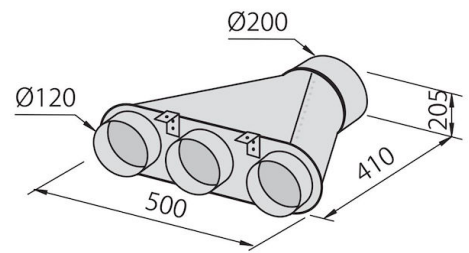

Collector for 3 pipes
2524 000

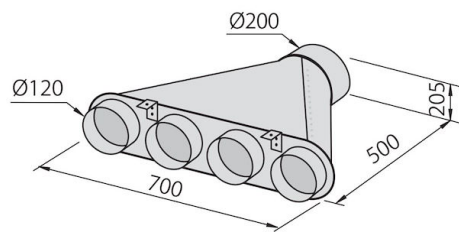

Collector for 4 pipes
2525 000



Flexible silencing canalization
9700 602



Flexible silencing canalization
9700 603