

Hood Flat white



Code: 2513 161





DETAILS


Coloring	White
Material	Glass
Energy class	A
Product details	Undercabinet with optional telescopic chimney and stainless engine-cover
Grease filters	Grease filtres: 1 filtre for 60 cm hood, 2 filtres for 90 cm hood, 4 filtres for 120 cm hood
Operation	Suction hood (filtering mode with optional carbon filters)
Air exhaust hole	ø 120/150 mm
Lighting	Strip LED lighting (4.200 kelvin)
Air flow rate	750mc/h



Motor power	275W
Hood type	Built-in suction hood
Type of commands	Touch Control
Suction speed	4 operating speeds
Notes:	Fume exhaust ducts must have an internal diameter not lower than 120 mm
FEATURES	
Auto delayed shutdown	All the models with electronic interface can be programmed to turn off the suction at a postponed moment, so as to prolong the aeration of the room even after the cooking has been completed.
Led lighting	Particular attention to energy saving with LED lighting systems. They assure a 10 times lower consumption and a 10 times longer duration. Our LED lights are designed to create an adequate comfort and safety in the cooking area.
Perimetric aspiration	The perimeter suction is a feature common to many Foster hoods. The filters are hidden by steel- or crystal plates and the suction occurs along their perimeter. This has aesthetic advantages but also functional ones: the cleaning is easier, the suction power and noise-level are improved. The depression which occurs in the perimeter area facilitates in fact the suction of the particles composing the fumes.



TECHNICAL DATA

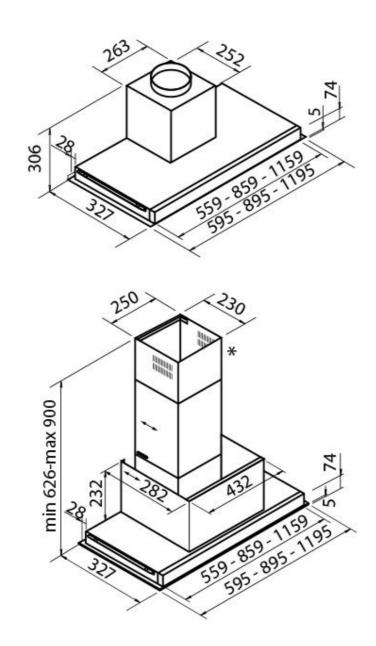



GALLERY







OPTIONAL ACCESSORIES






Ø150 Ø120

Ø200 Ø120

Carbon filter

Collector for 2 pipes

Collector for 3 pipes








Collector for 4 pipes

Flexible silencing canalization

Flexible silencing canalization







Stainless steel telescopic chimney