

## Hood Cilindro island

Hoods

Code: 2530 001



### DETAILS

Material AISI 304 stainless steel

---

Texture Brushed in line

---

Chimney height 920 - 1330 mm

---

Energy class A+

---

Product details Telescopic

---

Grease filters 1 grease filters in stainless steel

---

Operation Suction hood (filtering mode with optional carbon filters)

---

Air exhaust hole  $\varnothing$  120/150 mm

---

Lighting LED lighting: 4 x 1,2W (5.500 kelvin)


---

Motors	Brushless
Air flow rate	700mc/h
Motor power	160W
Hood type	Island suction hood
Type of commands	Minimal electronic controls
Suction speed	4 operating speeds
Notes:	Fume exhaust ducts must have an internal diameter not lower than 120 mm

## FEATURES

Auto delayed shutdown	All the models with electronic interface can be programmed to turn off the suction at a postponed moment, so as to prolong the aeration of the room even after the cooking has been completed.
Brushless motor	State-of-the-art Brushless motors allow high air flow rates while maintaining a low energy consumption. Furthermore, they have an almost never-ending duration.
Led lighting	Particular attention to energy saving with LED lighting systems. They assure a 10 times lower consumption and a 10 times longer duration. Our LED lights are designed to create an adequate comfort and safety in the cooking area.
Steel filters	Where the filter is in plain sight, the aluminium filtering element is covered in stainless steel. This solution improves the look and increases the durability of the product.

## TECHNICAL DATA

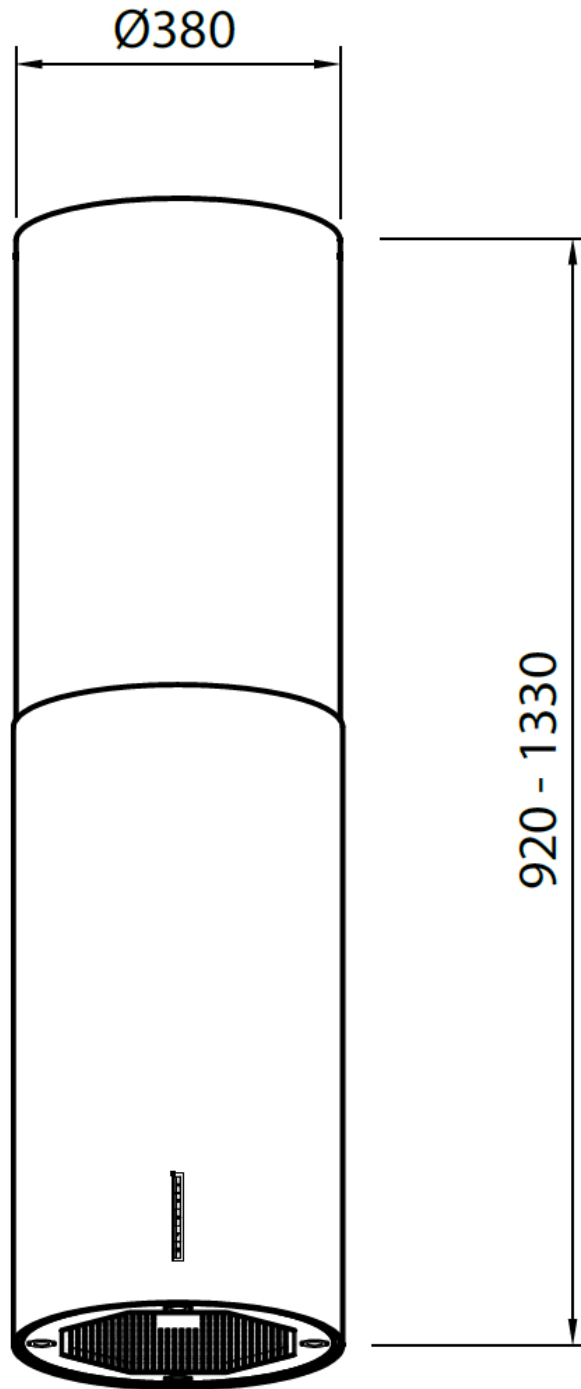


## GALLERY




## OPTIONAL ACCESSORIES




Carbon filter

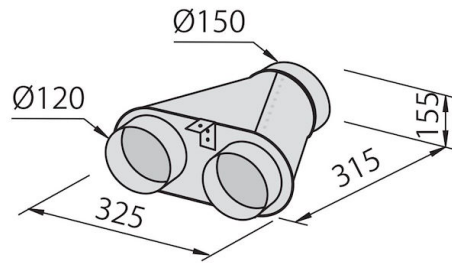

Collector for 2 pipes

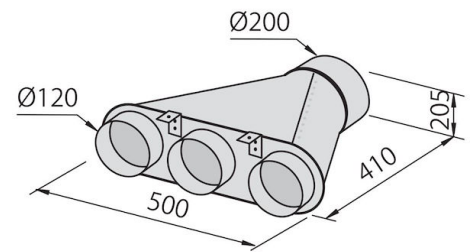

Collector for 3 pipes

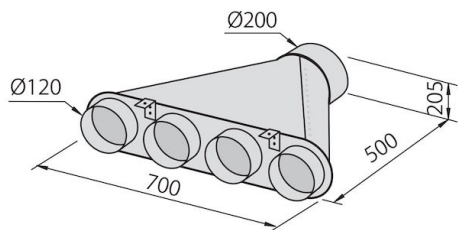

Collector for 4 pipes



Flexible silencing canalization



Flexible silencing canalization