
## Foster ==

### Hood Modular trio

Hoods

Code: 2536 000



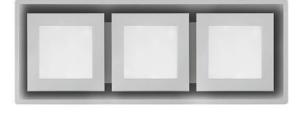

#### DETAILS

Coloring	White
Material	Stainless steel
Texture	Satin Finish - glass
Energy class	D
Ceiling – false ceiling distance	min 220 mm / max 310 mm
Full description	Modular Trio ceiling hood
Grease filters	2 grease filters
Operation	Suction hood (filtering modality not available)
Cut out	340x930 mm

# Foster ==


Air exhaust hole	ø 120 mm
Lighting	LED lighting (4.000 kelvin)
Motors	2
Air flow rate	850mc/h
Motor power	2x160W
Hood type	Ceiling suction hood
Type of commands	Remote control
Suction speed	4 operating speeds
Notes:	Fume exhaust ducts must have an internal diameter not lower than 120 mm
FEATURES	
Auto delayed shutdown	All the models with electronic interface can be programmed to turn off the suction at a postponed moment, so as to prolong the aeration of the room even after the cooking has been completed.
Led lighting	Particular attention to energy saving with LED lighting systems. They assure a 10 times lower consumption and a 10 times longer duration. Our LED lights are designed to create an adequate comfort and safety in the cooking area.
Perimetric aspiration	The perimeter suction is a feature common to many Foster hoods. The filters are hidden by steel- or crystal plates and the suction occurs along their perimeter. This has aesthetic advantages but also functional ones: the cleaning is easier, the suction power and noise-level are improved. The depression which occurs in the perimeter area facilitates in fact the suction of the particles composing the fumes.



Remote control

The ceiling suction systems and the Maya hoods are equipped with a remote control to easily activate all their functions from any position.

#### **TECHNICAL DATA**

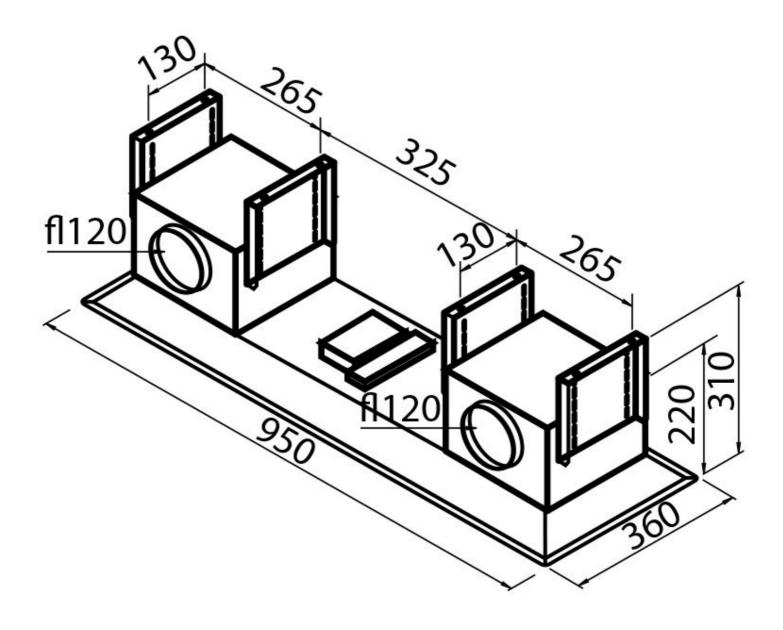


### Foster ==


#### GALLERY






#### **OPTIONAL ACCESSORIES**

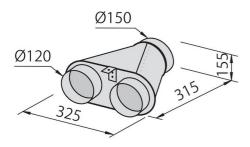





Collector for 2 pipes

Collector for 3 pipes

Collector for 4 pipes



Flexible silencing canalization



Modular light