



Hood Florence

Hoods

Code: 2538 121 120

120 cm



DETAILS


Material	Stainless steel
Texture	Brushed in line
Chimney height	
Energy class	А
Product details	Telescopic chimney
Grease filters	commercial style buffle filters
Operation	Suction hood (filtering mode with optional carbon filters)
Air exhaust hole	ø 120/150 mm
Lighting	LED lighting (4.000 kelvin)



Air flow rate	
Motor power	
Hood type	Wall-mounted suction wood
Type of commands	Electronic pushbutton
Suction speed	4 operating speeds
Notes:	Fume exhaust ducts must have an internal diameter not lower than 120 mm
FEATURES	
Auto delayed shutdown	All the models with electronic interface can be programmed to turn off the suction at a postponed moment, so as to prolong the aeration of the room even after the cooking has been completed.
high performance	Foster hoods motors have a high suction capacity. Their refined design hides a powerful appliance with professional features.
Led lighting	Particular attention to energy saving with LED lighting systems. They assure a 10 times lower consumption and a 10 times longer duration. Our LED lights are designed to create an adequate comfort and safety in the cooking area.
Steel filters	Where the filter is in plain sight, the aluminium filtering element is covered in stainless steel. This solution improves the look and increases the durability of the product.



TECHNICAL DATA

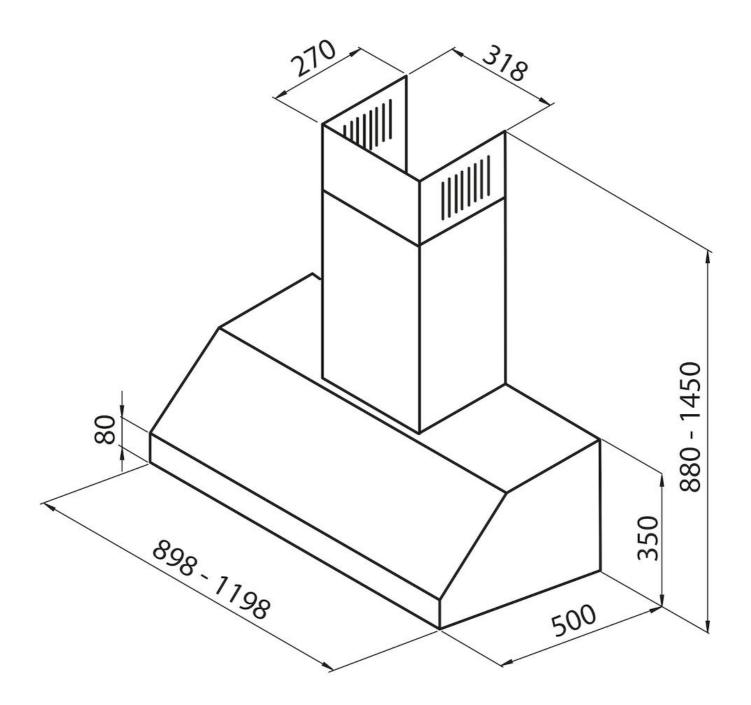



GALLERY





OPTIONAL ACCESSORIES



Carbon filter