



Cooker hob Veronika

Gas hobs

Code: 7063 052



DETAILS

| Edge/Installation Type | Standard (8 mm Edge) |
|------------------------|--------------------------|
| Finish | Foster brushed |
| Material | AISI 304 stainless steel |
| Texture | Brushed in line |
| Supply | 220-240 √; 50/60 Hz |
| Dimensions | 440x500 mm |
| Base size | 45cm |
| Heating element | three burners |
| Built-in hole | 420x480 mm |
| | |



| Grids | Cast iron grids and enamelled burner covers |
|--------------------|---|
| Width | 44 cm |
| Total power | 5.850 W |
| Auxiliary | 1.100 W |
| Semirapid | 1.750 W |
| Rapid | 3.000 W |
| Safety | Safety valve with quick-acting thermocouple |
| Ignition | Electric ignition under knob |
| Gas type | Tested for installation with natural gas, LPG nozzle set included. |
| Туре | Gas Hob |
| FEATURES | |
| Cast iron grids | Cast-iron is the ideal material for an hob grid, this due to the manifold properties characterising it: high heat capacity that improves cooking performance; high weight and stability that improve safety; sturdiness that preserves the hob's original aspect over time; easy cleaning. |
| lii series burners | III ^ series burners: 20% gas savings. They guarantee an efficiency well above the European standards. Furthermore, the improved combustion of gas allows the development of higher powers. From the point of view of safety, the blocking system between the cover and the flame-spreader guarantees perfect positioning and greater ease of cleaning. |




Safe cooking


All Foster cooker hobs are equipped with safety valves. They shut off the gas supply very quickly if the flame accidentally goes out.

Under-knob ignition

The utmost freedom of movement with electronic under-knob ignition, a common feature of all models that allows a one-hand ignition of the burner.

TECHNICAL DATA

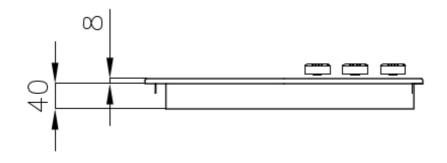

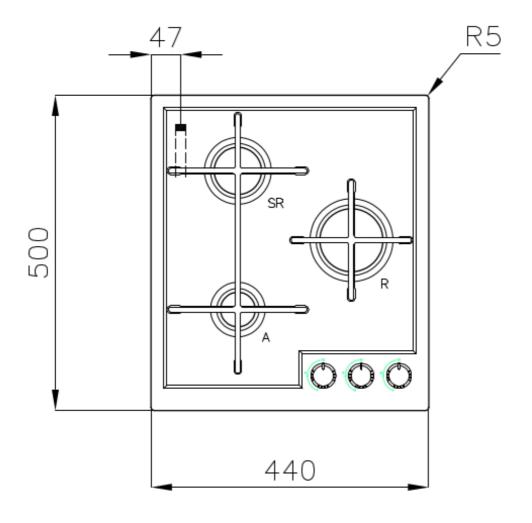



GALLERY



RECOMMENDED PAIRINGS





Hood KS 240_ 002

Sink Fortyfour