


Cooker hob S4000 Domino Induction

Induction Hobs

Code: 7341 655



DETAILS

Coloring	Black
----------	-------

Edge/Installation Type	Vertical edge - for flush-mount or over-mount installation
------------------------	--

Material	Ceramic glass
----------	---------------

Dimensions	380x520 mm
------------	------------

Base size	45cm
-----------	------

Heating element	Two zones
-----------------	-----------

Built-in hole	View technical data sheet
---------------	---

Width	38 cm
-------	-------

Total power	3.700 W
-------------	---------

Up	180x220 mm-2.100 (2.600)* (3.700)** W
----	---------------------------------------

Down	180x220 mm-2.100 (2.600)* (3.700)** W
------	---------------------------------------

Power settings	9 power settings per zone + double Powerboost
----------------	---

Safety	Safety equipment
--------	------------------

Type	Induction Hob
------	---------------

Type of commands	Touch Control
------------------	---------------

Notes:	* Powerboost ** Double Powerboost
--------	--------------------------------------

FEATURES

Double powerboost	Two further levels of power up to 3700 W, to be used on a single zone or distributed over the entire Bridge extended area (where available).
-------------------	--

Pot detector	All induction cooker hobs detect the pot resting on them, but they also calculate the area they cover. This system allows the energy to be used even more efficiently. Moreover, the plates switch off automatically when the pot is removed.
--------------	---


End-of-cooking programming	All operations are programmed by means of the touch-control on the glass itself. Each cooking plate is capable of independent programming, and thus the possibility to set different cooking times.
----------------------------	---

Timer	Independent timer from the end-of-cooking function.
-------	---


Slider commands	The Slider control allows for extremely quick temperature setting: with a light touch of the finger you may select the desired power level on the TOUCH display.
-----------------	--

T-chef function	It's a function that allows to set particular temperatures (42 °C, 70 °C, 94 °C) and keep them constant during cooking. Elaborate preparations can be easily obtained, with chef-like results. Cooking in a bain-marie, without the aid of a double container for the water, custard or cream sauce will thus always be perfect. By setting the temperature close to boiling, liquids will immediately reach the requested temperature, increasing speed and performance.
POT SPEED TEST	This feature tests your pots, grading them from 0 to 3 for efficiency and heating speed.
Intelligent Pot Localization	It recognizes which zone the pan is placed on and automatically activates the relative controls for power adjustment.
Recall	This feature allows you to call back the last settings selected in the previous cooking.
Pause	Useful function that allows you to distract your attention from cooking, interrupting and restoring the settings immediately.
Smart fan system	Correct ventilation is essential for the induction hob to function in the best possible way. The Foster system automatically regulates the amount of ventilation to suit the temperatures reached.
Safety	All electric cooker hobs feature the most modern and sophisticated safety protections: Centralised power-off function; Child-proof safety lock; Residual heat warning lights. Induction models feature the following functions: Safety System that turn off the hob in the absence of the pot; Overflow detector that automatically turns off the plate in case of liquid overflow; Automatic deactivation to prevent accidents caused by forgetfulness.
AUTOMATIC BRIDGE	When a pot invades 2 different zones, it activates the Bridge function automatically.
Bridge zone	The new cooktops with Bridge function allow to associate two zones forming a single extended cooking zone for pots of large size, or for more than one cooking simultaneously, with maximum flexibility in pot positioning. With the additional Double Booster feature provided by all Bridge cooktops, the exceptional 3700 W power can be concentrated on a single plate or made available uniformly over the enlarged area.

TECHNICAL DATA

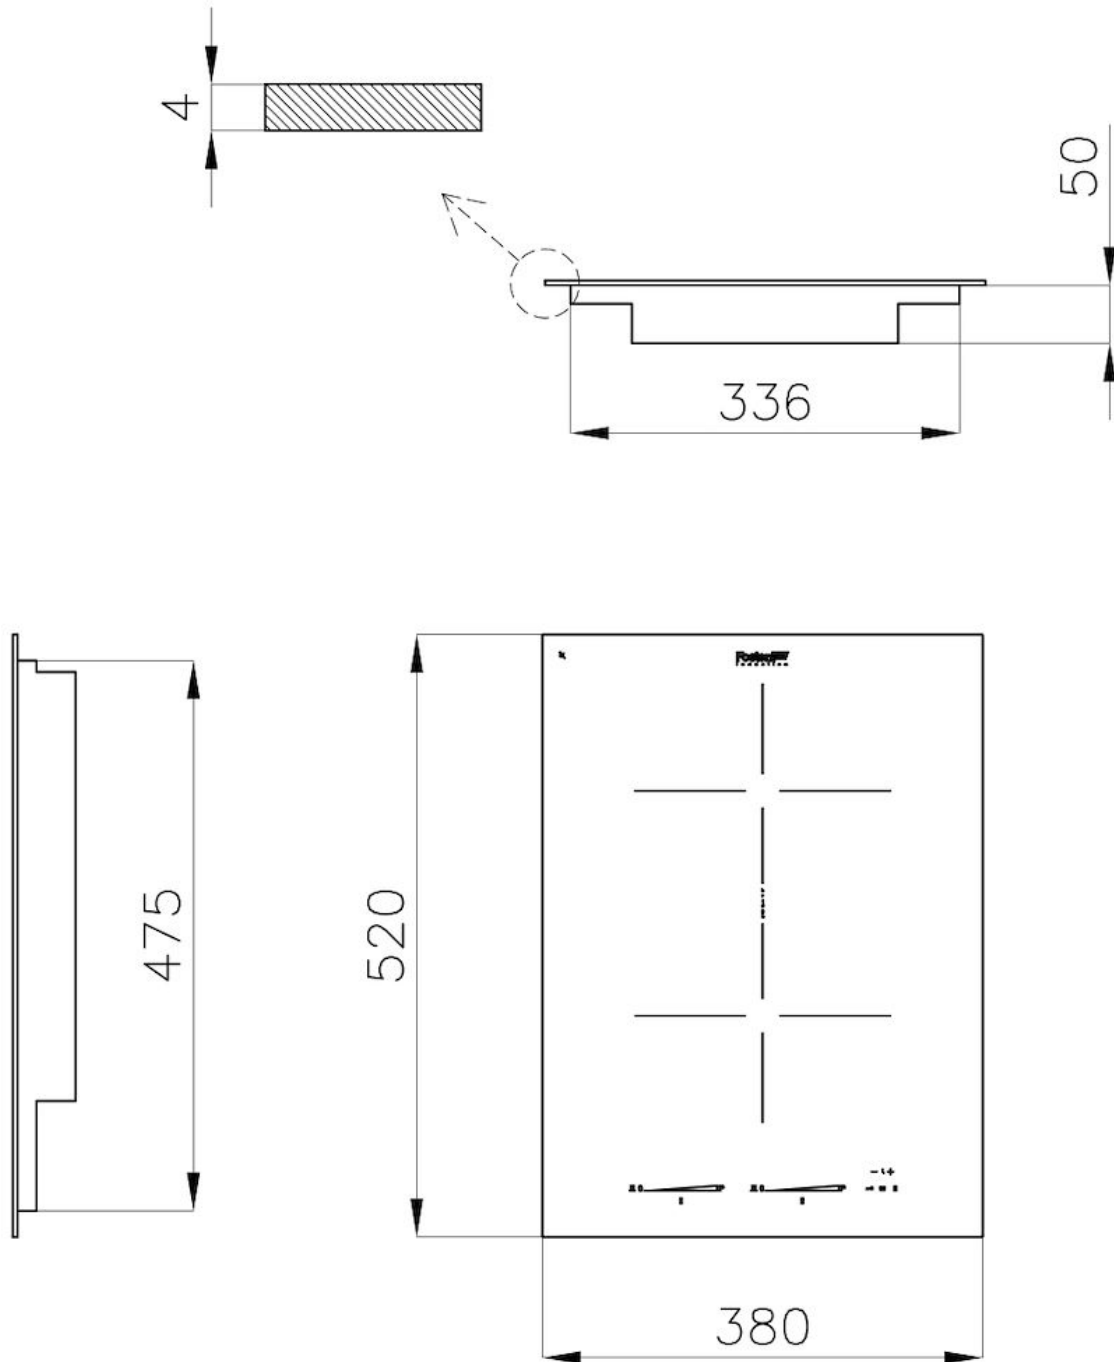


Cut out size
Dimensioni per foratura top

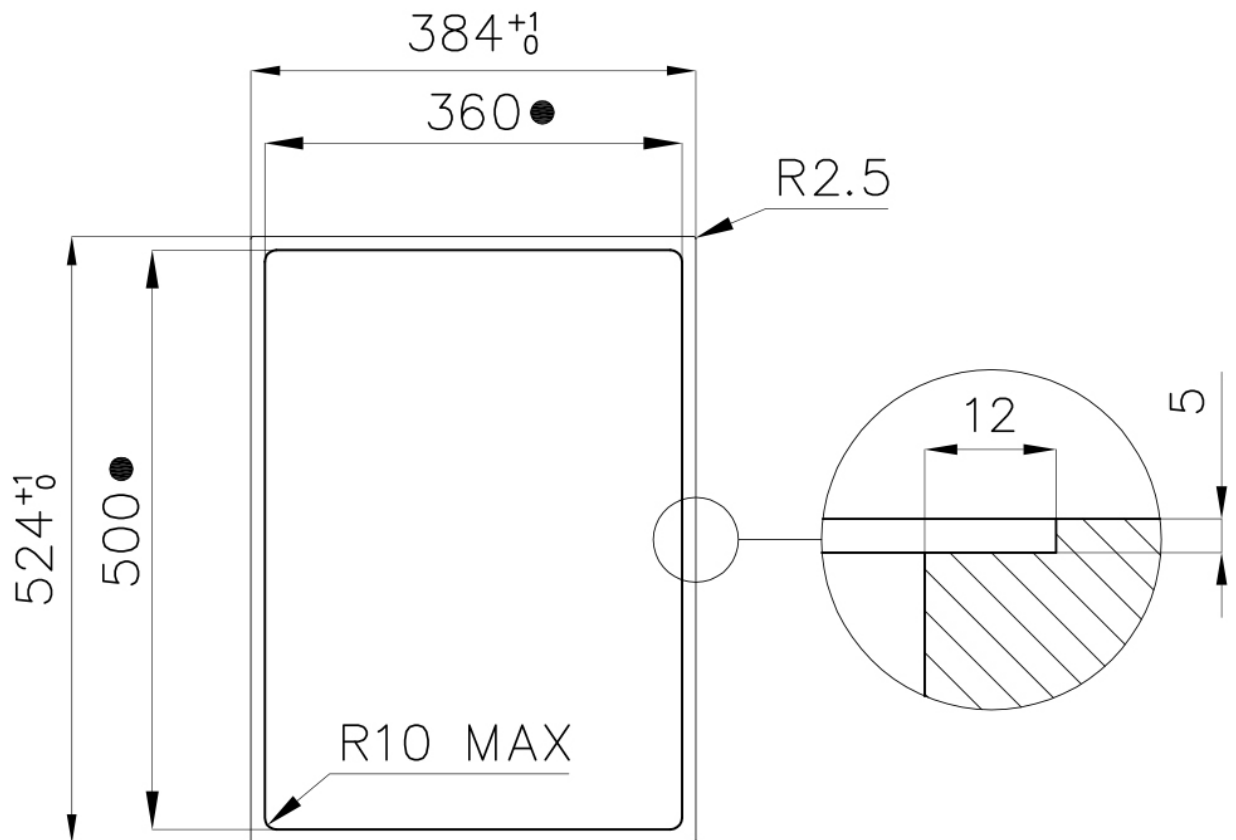

- Built-in cut out for FTS – Foratura per installazione FTS

GALLERY

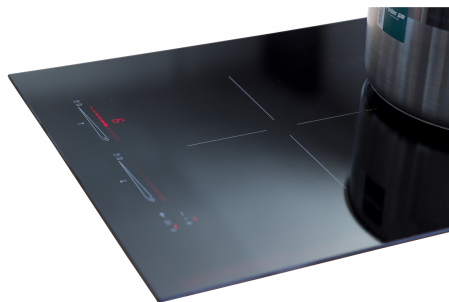

OPTIONAL ACCESSORIES



Spacer for Domino elements
8320 000

RECOMMENDED PAIRINGS



Hood S4000 Domino Ghost
2451 000



Sink S4001 Filotop
3365 050